


Hexagon keys
for socket screws, steel, hardened

DIN 911

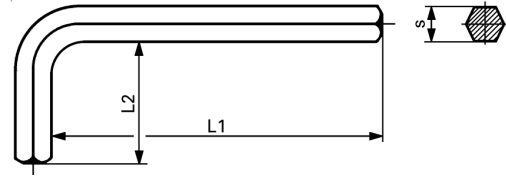

s	h11	L2	L1	for screws				plain	
				ISO 4762	DIN 7984	ISO 4026-9	ISO 7380		
				DIN 912		DIN 913-916	DIN 7991		
quantity				DIN 6912		ISO 7379		10	100
WAF				M	M	M	M		
0.7	6	32				1,6		122.-	81.50
0,9	10	32				2		105.-	72.40
1,3	12	40		1,4		2,5		81.50	47.-
1,5	14	45		1,6/2		3		55.-	20.50
2	16	50		2,3/2,5/2,6	3	4	3	57.-	22.-
2,5	18	56		3	4	5	4	59.-	24.-
3	20	63		4	5	6	5	59.-	24.-
4	25	70		5	6	8	6	62.50	33.60
5	28	80		6	8	10	8	75.50	41.50
6	32	90		8		12/14	10	87.-	54.-
7	34	95			10			150.-	110.-
8	36	100		10	12	16	12	156.-	115.-
10	40	112		12	14	18/20	14/16	233.-	168.-
12	45	125		14	16/18	22/24	18/20	396.-	270.-
14	56	140		16/18	20/22		22/24	560.-	386.-
17	63	160		20/22	24			900.-	640.-
19	70	180		24/27				1340.-	955.-
22	80	200		30				1990.-	1410.-
24	90	224		33				3180.-	2270.-
27	100	250		36/39				3450.-	
32	125	315		42/45				7090.-	
36	140	355		48/52				11730.-	

s	h11	L2	L1					zinc plated	
quantity								10	100
WAF				M	M	M	M		
1,5	14	45		1,6/2		3		74.50	25.-
2	16	50		2,3/2,5/2,6	3	4	3	74.50	25.-
2,5	18	56		3	4	5	4	77.50	28.25
3	20	63		4	5	6	5	77.50	28.25
4	25	70		5	6	8	6	85.50	36.25
5	28	80		6	8	10	8	96.-	48.50
6	32	90		8		12/14	10	118.-	70.-
8	36	100		10	12	16	12	207.-	128.-
10	40	112		12	14	18/20	14/16	275.-	205.-