


# A4

Socket head cap screws  
with low head, stainless steel  
with pilot recess

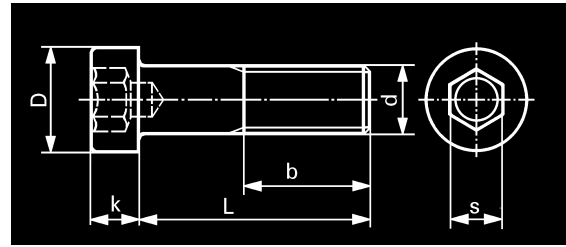

## DIN 6912


d	M4		M5		M6		M8		
D	7		8,5		10		13		
b	14		16		18		22		
k	2,8		3,5		4		5		
s	3		4		5		6		
L	quantity	100	1000	100	1000	100	1000	100	1000
6		92.-	68.-						
8		85.-	62.-						
10		82.50	59.-	90.50	64.50				
12		82.50	59.-	90.50	64.50	101.-	74.-		
16		68.-	47.-	73.50	52.50	89.-	64.50	148.-	110.-
20		72.50	50.50	75.50	54.-	94.50	68.50	136.-	99.50
25		74.50	53.-	80.50	57.-	104.-	75.50	144.-	104.-
30		88.-	63.50	92.50	66.50	112.-	81.-	148.-	110.-
35				103.-	74.-	117.-	85.-	162.-	121.-
40				113.-	81.-	134.-	97.-	204.-	151.-
45								223.-	175.-
50						179.-	133.-	256.-	208.-
55								280.-	237.-
60						223.-	165.-		

Reduced tightening and loads: refer to page T 25

----- Above dash-line: fully threaded

# A4

Socket head cap screws  
with low head, stainless steel  
with pilot recess

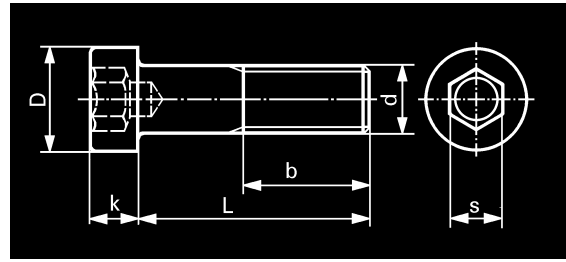

## DIN 6912

d	M 10		M 12		M 16	
D	16		18		24	
b	26		30		38	
k	6,5		7,5		10	
s	8		10		14	
L quantity	100	1000	100	1000	100	
16	247.-	192.-				
20	241.-	182.-	420.-	316.-		
25	228.-	173.-	420.-	316.-	1240.-	
30	230.-	174.-	425.-	322.-	1140.-	
35	246.-	186.-	445.-	346.-		
40	268.-	203.-	470.-	387.-	1300.-	
45	298.-	225.-	505.-	415.-		
50	328.-	260.-			1400.-	
60	396.-	320.-				
Reduced tightening and loads: refer to page T 25						

----- Above dash-line: fully threaded