
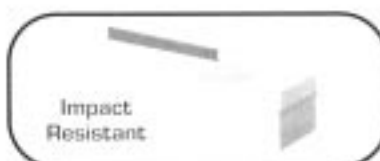


Liquid Tight Polystyrene Enclosures

for Indoor Installations

VDE 0606

PART NUMBER	BOX SIZE	DIMENSIONS						SIDE PANEL CONFIGURATION No. and Size	MOUNT WITH #8-UNC SCREWS
		INCHES			MM				
		W	H	D	W	H	D		
D 9020 D 9120	1	3.5 x 3.5 x 2.1			(88 x 88 x 53)			7 Pg 13.5	2 Inside Box 2 Outside Lugs
D 8020 D 8120	1	3.5 x 3.5 x 2.1			(88 x 88 x 53)			Smooth (No Knock-Outs)	2 Inside Box 2 Outside Lugs
D 9040 D 8040	2	3.9 x 3.9 x 2.3			(98 x 98 x 58)			7 Pg 16 Smooth (No Knock-Outs)	2 Inside Box 2 Inside Box
K 9060 K 8060	3	5.5 x 4.7 x 2.8			(139 x 119 x 70)			4 Pg 16 + 6 Pg 16/21 Smooth (No Knock-Outs)	4 Inside Box 4 Inside Box
K 9100 K 8100	4	6.6 x 4.9 x 3.2			(167 x 125 x 82)			10 Pg 16/21 Smooth (No Knock-Outs)	4 Inside Box 4 Inside Box
K 9250 K 8250	5	7.9 x 6.3 x 3.9			(200 x 160 x 98)			10 Pg 21/29 Smooth (No Knock-Outs)	4 Inside Box 4 Inside Box
K 9500 K 8500	6	12.2 x 8.3 x 4.6			(310 x 210 x 116)			10 Pg 16/21 + 4 Pg 29/36 Smooth (No Knock-Outs)	4 Inside Box 4 Inside Box

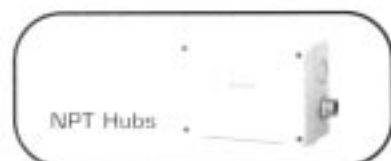

Liquid Tight Polycarbonate Enclosures

for Outdoor & Harsh Environments (Impact & UV Resistant)

CUL (Box 1-5), VDE 0606

PART NUMBER	BOX SIZE	DIMENSIONS						SIDE PANEL CONFIGURATION No. and Size	MOUNT WITH #8-UNC SCREWS
		INCHES			MM				
		W	H	D	W	H	D		
KF 9020 KF 8020	1	3.5 x 3.5 x 2.1			(88 x 88 x 53)			7 Pg 13.5 Smooth (No Knock-Outs)	2 Inside Box
KF 9040 KF 8040	2	3.9 x 3.9 x 2.3			(98 x 98 x 58)			7 Pg 16 Smooth (No Knock-Outs)	2 Inside Box
KF 9060 KF 8060	3	5.5 x 4.7 x 2.8			(139 x 119 x 70)			4 Pg 16 + 6 Pg 16/21 Smooth (No Knock-Outs)	4 Inside Box
KF 9100 KF 8100	4	6.6 x 4.9 x 3.2			(167 x 125 x 82)			10 Pg 16/21 Smooth (No Knock-Outs)	4 Inside Box
KF 9250 KF 8250	5	7.9 x 6.3 x 3.9			(200 x 160 x 98)			10 Pg 21/29 Smooth (No Knock-Outs)	4 Inside Box
KF 9500 KF 8500	6	12.2 x 8.3 x 4.6			(310 x 210 x 116)			10 Pg 16/21 + 4 Pg 29/36 Smooth (No Knock-Outs)	4 Inside Box

COPYRIGHT 1989 MARYLAND METRICS

Dimensions and specifications may be changed without prior notice

SPECIFICATIONS

Liquid Tight: NEMA 4x (IP65)
Temperature: -40°F to 212°F (-40°C to 100°C)
Cover Screws: 304 Stainless Steel
Hinge & Latch: 304 Stainless Steel
Cover Seal: TPE (Thermoplastic Elastomer)
Max. Voltage: 670 V

	D/K SERIES	KF SERIES
MATERIAL:	Polystyrene	Polycarbonate (glass fiber reinforced)
COLOR:	Grey RAL 7032	Grey RAL 7035

Enclosure Sides: With Pg knock-outs or smooth for custom drilling. The knock-outs for Pg threads have the following diameters: Pg 13.5 = .80", Pg 16 = .88", Pg 21 = 1.12", Pg 29 = 1.47", Pg 36 = 1.85.

HENSEL products from: MARYLAND METRICS

[CLICK HERE TO RETURN TO THE HENSEL PAGE INDEX](#)