

## GRADUATION CODES

<b>S1</b> English Regular - feet, inches, 1/16"	
<b>S3</b> ...Diameter Tape - inches, 1/16" one side, diameter inches other side.	
<b>S3A</b> .1/4" Tape - inches, 1/16"	
<b>S6</b> ...Millimeter graduations, centimeter numbering full length.	Metric Only
<b>S8</b> ...Millimeter graduations, millimeter numbering to each decimeter and repeat.	
<b>S9</b> ...Millimeter graduations, centimeter numbering to end one edge, feet, inches 1/16" other edge.	English/Metric
<b>S12</b> ...Millimeter graduations, millimeter numbering to each decimeter and repeat one edge, feet, inches, 1/16" other edge.	

## MAGNESIUM MEASURING TAPES

- The first and only tape case made of rugged, lightweight magnesium metal.
- Compact size, shape with non-slip rubber grip.
- Soft touch cam - activated lock prevents blade slippage.
- Heavy duty, UV coated blade is 3x more wear resistant.
- Tough-Tip® blade protector.
- Improved reel design for smoother action - heavy duty, rust-resistant return spring.
- New shock absorbing blade bumper.



Blade Width	Blade Length	Catalog No.	Graduation	EDP No.	Price
1"	25'	MG1-25	S1	66993	

## AUTOMATIC CONTROLOK® TAPE MEASURES -

### SERIES 791:

- New tape design features top mounted control lever allowing automatic locking of blade when thumb pressure is released. No accidental blade retraction like on bottom lock tapes.
- Rubber top grip, compact size for comfort and easy handling.
- Heavy duty UV top-coated blades.
- Yellow blades
- Tough-Tip® blade protectors.



Blade Length	Catalog No.	EDP No.	Case Color	Graduation Style	Price
<b>1/2" (13mm)</b>					
12'	AC12-12	65336	Chrome	S1	
12'	AO12-12	65337	Neon Orange	S1	
12'	AY12-12	65927	Yellow	S1	
4M/12'	AC12-4ME12	65724	Chrome	S12	
4M/12'	AG12-4ME9	65728	Lime Green	S9	
4M/12'	AG12-4ME12	65730	Lime Green	S12	
<b>3/4" (19mm)</b>					
16'	AC34-16	65304	Chrome	S1	
16'	AO34-16	65305	Neon Orange	S1	
16'	AY34-16	65926	Yellow	S1	
5M	AC34-5M8	65685	Chrome	S8	
5M/16'	AG34-5ME9	65692	Lime Green	S9	
5M/16'	AG34-5ME12	65694	Lime Green	S12	
<b>1" (25mm)</b>					
16'	AC1-16	66409	Chrome	S1	
25'	AC1-25	65284	Chrome	S1	
25'	AO1-25	65285	Neon Orange	S1	
25'	AY1-25	65925	Yellow	S1	
8M	AC1-8M6	65671	Chrome	S6	
8M/26'	AC1-8ME9	65674	Chrome	S12	
8M/26'	AY1-8ME12	66197	Yellow	S9	
33'	AC1-33	66396	Chrome	S1	
33'	AY1-33	66397	Yellow	S1	
10M	AY1-10M8	66406	Yellow	S8	
10M/33'	AY1-10ME12	66402	Yellow	S12	

## DIGITAPE® ELECTRONIC MEASURING TAPES



### Versatile, Reliable Features and Benefits:

- Large electronic figures for fast, error-free accuracy
- Dual reading through the electronic display or by referencing the fully graduated blade
- Rugged, high-impact resistant case
- Strong tape line with no holes punched through, like in cheap imitations
- An internal optical sensor reads bar codes printed directed on the blade.

- Simple operation – pull out and lock in place as any regular measuring tape
- Furnished with long life Duracell® battery, warranty and easy instructions

### Action Features with Simple, Push-Button Controls:

- Displays feet, inches, fractions or centimeters.
- Finest graduations, 1/16" and 1 mm (digital and printed)
- Automatically adds the length of the case to an inside measurement
- Zero the reading at any blade position
- Inch/centimeter button for instant conversion except on the straight metric style
- Freezes a measurement in memory indefinitely, even after the blade is retracted
- Automatic shutoff after five minutes of inactivity, which extends battery life.

Length	Readout	Graduation	Catalog No.	EDP	Price
<b>3/4" (19 mm) Blade Width</b>					
16' (5M)	English/Metric	S1	D34-16	64639	
16' (5M)	English/Metric	S9	D34-5CME	65599	
<b>1" (25 mm) Blade Width</b>					
25' (8M)	English/Metric	S1	D1-25	64443	
25' (8M)	English/Metric	S9	D1-8CME	64292	

\*Reads left and right on the blade.

## SPECIALTY MEASURING TAPES

### SERIES 791:

**Locking or Non-Locking Thin Tapes:** Chrome-plated case is thin, durable and compact. Case is 2" (50mm) wide at the base. Easy-to-read black markings on blade. Non-movable end hook. Locking models have convenient push-button lock at the side of the base.

**Thin Locking Diameter Tape:** Diameter tape has a 120" linear length, graduated linear in consecutive inches to 16ths on one edge and diameter inches to 1/100ths of an inch on the other edge. Chrome case finish.

**Mini-Tape with Key Chain:** Handy, chrome-plated mini-tape with key chain, 1/4" wide blade, 3' length.



\*Linear Inches

Length	Graduation	Catalog No.	EDP No.	Price
<b>Locking Thin Tapes – 1/4" (6mm) Width</b>				
10'	S3A	C14-10L	65794	
3M/10'	S12	C14-3ME12L	65795	
<b>Non-Locking Thin Tapes – 1/4" (6mm) Width</b>				
10'	S3A	C14-10	65796	
3M/10'	S12	C14-3ME12	65797	
<b>Locking Diameter Tape – 1/4" Width</b>				
120*	S3	C14-10J	65798	
3'	S3A	C14-3Y	65802	





Industrial Quality Tape Measures with heavy-duty blades as standard. This is the basic measuring tape style used by professionals and homeowners throughout the world. They are named Tru-Lok<sup>®</sup> because the blade positively locks in position until the cam-activated lock button is released. A new, heavy-duty tape line is furnished

standard, making the tape ideal for work under demanding conditions. Tru-Lok<sup>®</sup> tapes are available in five case colors — smooth, shiny chrome cases (considered by many to be the “class” of measuring tapes), charcoal black and three high-visibility colors (another Starrett innovation) that easily stand out in the toolbox, workbench or job site.

## TRU-LOK<sup>®</sup> MEASURING TAPES

### SERIES 791:

- Tough Tip<sup>®</sup> Blade Protector standard on all 1" and 3/4" (25 and 19 mm) blades
- Rugged, impact resistant case

Length	Grad.	Case Color	Catalog No.	EDP No.	Price
<b>1/2" (13mm) Tru-Lok<sup>®</sup> Tapes</b>					
12'	S1	Chrome	C12-12	65418	
12'	S1	Charcoal	CH12-12	65942	
12'	S1	Neon Orange	O12-12	65419	
12'	S1	Lime Green	G12-12	65420	
12'	S1	Yellow	Y12-12	65943	
4M	S8	Chrome	C12-4M8	65781	
4M	S6	Lime Green	G12-4M6	65785	
4M /12'	S9	Chrome	C12-4ME9	65782	
4M /12'	S12	Chrome	C12-4ME12	65784	
4M /12'	S9	Lime Green	G12-4ME9	65788	
4M /12'	S12	Lime Green	G12-4ME12	65790	
4M /12'	S12	Charcoal	CH12-4ME12	65944	
<b>3/4" (19mm) Tru-Lok<sup>®</sup> Tapes</b>					
16'	S1	Chrome	C34-16	65386	
16'	S1	Charcoal	CH34-16	65937	
16'	S1	Neon Orange	O34-16	65387	
16'	S1	Lime Green	G34-16	65388	
16'	S1	Yellow	Y34-16	65938	
5M	S6	Chrome	C34-5M6	65755	
5M	S6	Lime Green	G34-5M6	65761	
5M	S8	Lime Green	G34-5M8	65763	
5M/16'	S9	Chrome	C34-5ME9	65758	
5M/16'	S11	Chrome	C34-5ME11	65759	
5M/16'	S12	Chrome	C34-5ME12	65760	
5M/16'	S12	Neon Orange	O34-5ME12	66206	
5M/16'	S9	Lime Green	G34-5ME9	65764	
5M/16'	S12	Lime Green	G34-5ME12	65766	
5M/16'	S12	Charcoal	CH34-5ME12	65939	
25'	S1	Chrome	C34-25	65402	
25'	S1	Charcoal	CH34-25	65940	
8M	S8	Lime Green	G34-8M8	65774	
8M/26'	S12	Charcoal	CH34-8ME12	65941	
<b>1" (25mm) Tru-Lok<sup>®</sup> Tapes</b>					
25'	S1	Chrome	C1-25	65366	
25'	S1	Charcoal	CH1-25	65932	
25'	S1	Neon Orange	O1-25	65367	
25'	S1	Lime Green	G1-25	65368	
25'	S1	Yellow	Y1-25	65933	
8M	S6	Chrome	C1-8M6	65743	
8M	S6	Lime Green	G1-8M6	65749	
8M	S8	Lime Green	G1-8M8	65751	
8M/26'	S9	Chrome	C1-8ME9	65746	
8M/26'	S12	Chrome	C1-8ME12	65748	
8M/26'	S9	Lime Green	G1-8ME9	65752	
8M/26'	S12	Lime Green	G1-8ME12	65754	
8M/26'	S12	Charcoal	CH1-8ME12	65934	
30'	S1	Chrome	C1-30	65382	
30'	S1	Neon Orange	O1-30	65383	
30'	S1	Lime Green	G1-30	65384	
30'	S1	Yellow	Y1-30	65936	
30'	S1	Charcoal	CH1-30	66209	
33'	S1	Chrome	C1-33	66407	
33'	S1	Yellow	Y1-33	66408	
10M/33'	S12	Yellow	Y1-10ME12	66379	

## RE-TAPE<sup>™</sup> MEASURING TAPE



### SERIES 791:

- Re-Tape has the same design features as our Tru-Lok<sup>®</sup> tapes, except the case consists of reground materials from other Starrett cases and it has a regular end-hook (not a Tough Tip<sup>®</sup>). Furnished with a new (not recycled) 1" blade, it is a durable tape, great for the environment, and also attractively priced.



Length	Blade Width	Grad.	Catalog No.	EDP No.	Price
25'	1"	S1	CS1-25-1	64183	
8M/26'	1" (25 mm)	S12	CS1-8ME	65897	

## 1" X 25' RAPID-RETAPE<sup>™</sup>



### SERIES 791:

#### Now Re-Tape has fractional readouts!

- Quick reading convenient 1/8" fractional readouts clearly the blade. (S1 Graduation)
- Enviro-Friendly – made from recycled cases and a new 1" x 25' steel blade.
- Rugged, impact-resistant case.
- Tru-Lok<sup>®</sup> positive lock to prevent blade pull back.



**Catalog No. CSR1-25**

**EDP No. 66549**

**Price:**

## CODE TAPE<sup>™</sup> MEASURING TAPE



### SERIES 791:

- This rugged tape with Tru-Lok<sup>®</sup> design features a heavy-duty blade as standard, has special information printed on the blade that commercial builders and contractors will appreciate. The 1" blade gives practical information for the building, locating and installation of various equipment required by the ADA (Americans with Disabilities Act).
- Available in chrome case.



Length	Blade Width	Catalog No.	EDP No.	Price
25'	1"	CT1-25	65896	

## DIGITAL TAPE MEASURE

### MIT SERIES 216:

#### Digicon Easy-Reading Digital Tape Measure

Mitutoyo's new Digital Tape Measure is a fast and convenient tool for a wide range of length measuring jobs. Its digital readout is displayed on a large, easy-to-read LCD. The zero set button allows the origin point to be set at any time, eliminating the need for manually calculating comparison measurements. The 1" (25mm) steel blade is also easy to read.

#### FEATURES

- 1" (25mm) blade width
- 216"/18'/5.5m measuring range
- Large LCD readout
- Display reads feet, inches, fractions or millimeters
- Zero-setting, measurement hold and inside measuring capability
- 5 minute "auto off" feature saves battery
- Durable carry case; belt clip
- Battery life of 2,500 hours continuous use

Order No. 216-380

Price:



## MEASURING TAPES

### SERIES 449:

Professional high quality tapes feature a wide, deep concaved blade for maximum extension and rigidity. Black and red markings on yellow blade with stud marking every 16 inches. Graduated in 16ths on both edges of one side with 32nds on first 12 inches.



Blade Size		Order No.	Price
Width	Length		
1/2"	10'	4493210	
1/2"	12'	4493212	
3/4"	12'	4494812	
3/4"	16'	4494816	
1"	25'	4494825	

- Fingertip lock holds the blade where you want it
- Automatic blade return
- Metal belt clip
- Chrome plated case

### PI Tape® SERIES 338:



### Only One Diameter Measurement Necessary

The periphery tape or **Pi Tape®** gage, provides a quick, accurate and easy method of reading true diameters of both round and out-of-round forms. Perfect for measurement of thin or soft walled parts — large or small.

Pi Tape® gages consist of a narrow metal ribbon bearing special graduations. These graduations are designed to convert circumferential distance into diameter measurement so the observer can read the diameter directly from the scale.

Tapes are checked over master gages at .001" (.03mm) accuracy for standard tapes up to 144" (3600mm). Certificate of accuracy traceable to National Institute of Standards and Technology is furnished.


Pi Tape® gages are a precision tool made of 1095 clock spring steel (on request 420 stainless steel — for use in a corrosive atmosphere). They require a minimum of maintenance, but we do recommend a quick wipe with an oil moistened cloth after use. A light gun oil works very well.

Standard tapes have graduations and numerals that are engraved and acid etched on a ground surface. The tape has a fixed reading that does not require periodic adjustments.

English reading tapes read to .001" diameter.  
Accuracy of standard tapes ± .001" up to 144".

Metric reading tapes read to 0.01mm diameter.  
Accuracy of standard tapes ± 0.03mm up to 3600mm.

Calibration performed in accordance with ANSI/NCSL Z540-1-1994, ISO/IEC Guide 25 and Mil-Std. 45662A.

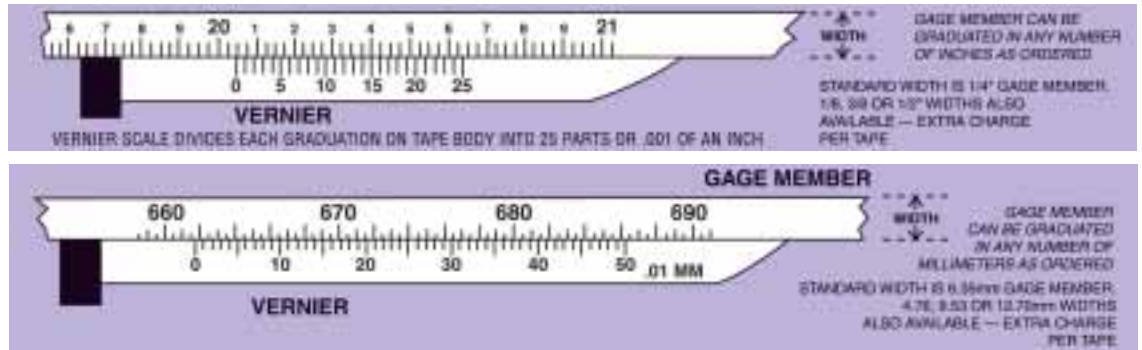

### METRIC

### INCH

Part No.	Dia. mm	Gage Member mm	Thick-ness mm	Body Width mm	Order No.	Price	Part No.	Dia. Inches	Gage member	Thick-ness	Body Width	Order No.	Price
PM0	28-200	6.35	0.18	12.7	3380000		P000	.500" to 2"	1/4"	.007"	1/2"	3385000	
PM1	100-300	6.35	0.25	12.7	3380001		P01	.75" to 7"	1/4"	.007"	1/2"	3385201	
PM1SP	50-600	6.35	0.25	12.7	3380101		P1	2" to 12"	1/4"	.010"	1/2"	3385001	
PM2	300-600	6.35	0.25	12.7	3380002		P1SP	2" to 24"	1/4"	.010"	1/2"	3385101	
PM2SP	300-900	6.35	0.25	12.7	3380102		P2	12" to 24"	1/4"	.010"	1/2"	3385002	
PM3	600-900	6.35	0.25	12.7	3380003		P2SP	12" to 36"	1/4"	.010"	1/2"	3385102	
PM3SP	600-1200	6.35	0.25	12.7	3380103		P3	24" to 36"	1/4"	.010"	1/2"	3385003	
PM4	900-1200	6.35	0.25	12.7	3380004		P3SP	24" to 48"	1/4"	.010"	1/2"	3385103	
PM5	1200-1500	6.35	0.25	12.7	3380005		P4	36" to 48"	1/4"	.010"	1/2"	3385004	
PM6	1500-1800	6.35	0.25	12.7	3380006		P5	48" to 60"	1/4"	.010"	1/2"	3385005	
PM7	1800-2100	6.35	0.25	12.7	3380007		P6	60" to 72"	1/4"	.010"	1/2"	3385006	
PM8	2100-2400	6.35	0.25	12.7	3380008		P7	72" to 84"	1/4"	.010"	1/2"	3385007	
PM9	2400-2700	6.35	0.25	12.7	3380009		P8	84" to 96"	1/4"	.010"	1/2"	3385008	
PM10	2700-3000	6.35	0.25	12.7	3380010		P9	96" to 108"	1/4"	.010"	1/2"	3385009	
PM11	3000-3300	6.35	0.25	12.7	3380011		P10	108" to 120"	1/4"	.010"	1/2"	3385010	
PM12	3300-3600	6.35	0.25	12.7	3380012		P11	120" to 132"	1/4"	.010"	1/2"	3385011	
							P12	132" to 144"	1/4"	.010"	1/2"	3385012	