


Curved Washer

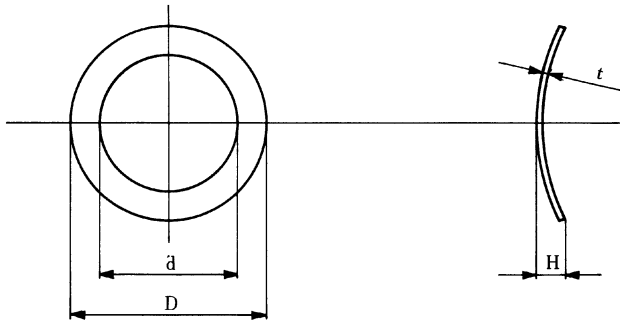

Unit : mm

Size-No.	d		D		H		t	Remarks		
	Basic	Tol.	Basic	Tol.	Basic	Tol.		Design Variation	Material	Hardness (HRC)
MB-1711	1.7	+0.2 -0.1	3.7	±0.2	0.6	±0.2	0.1		C5210P	—
3212	3.2		6.5		1		0.15	SUS	31(Min.)	
4001	4.1		10		1.3		0.2		43~51	
4201	4.2		10		1.2		0.25			
4301	4.3		6.8		1		0.15			
4302	4.3		8		1.2		0.3			
5011	5	±0.2	7.9	±0.2	1.2	±0.2	0.15			
5211	5.2		10		1.2		0.1	C5191P	—	
5301	5.3		10		1.4		0.3			
6201	6.2		11		1.2		0.2		43~51	
6203	6.2		11		1.4		0.15			
6301	6.3		11		1.5		0.4			
6411	6.4		24	±0.3	2.5		0.4		SUS	42~52
6511	6.5		9.8	±0.2	1.2		0.5		SUS	31(Min.)
6811	6.8		10.6		1.8		0.15			
8302	8.5	±0.3	15	±0.3	2.3	±0.3	0.5			
8501	8.5		16		3		0.4			
12511	12.5	±0.3	16.8	±0.3	2.2	±0.3	0.4			
14501	14.5		20		3		0.3			
15900	15.9		20		1.3		0.25		37~43	
16601	16.6		25		2		0.3	Fig. 1	38~45	

●Material=Carbon spring steel. Hardness=HRC40~50. Finish=Phosphate coating.