

Screwdrivers



Products are available from
MARYLAND METRICS

P.O. Box 261 Owings Mills, MD 21117 USA

ph: (410)358-3130 (800)638-1830

fx: (410)358-3142 (800)872-9329

web: <http://mdmetric.com> email: sales@mdmetric.com

RFQ form: <http://mdmetric.com/rfq.htm>



The power is where you put it with the **SKDRALL** screwdriver series

The efficiency with which you use a screwdriver in your daily work, and the safety with which you work, depend to a large extent on the quality of the tool. It is not just the use of high-grade materials but also the shape that matters – in particular the shape of the handles – if you want to stay in control.

STAHLWILLE's **SKDRALL** screwdrivers unite these positive qualities in a manner which is close to perfect. The result is a longlife, ergonomically designed tool providing easy working combined with maximum force transmission – even with greasy hands.



SKDRALL screwdrivers are available in sets conveniently positioned in plastic inlays or TCS safety inlays, designed for use with STAHLWILLE Tool Trolleys and Tool Boxes.

SKDRALL handles are made up of 3 components:

1st component

Extremely resistant, impact-safe core made of black polypropylene (PP).

2nd component

Soft, heat-bonded inlay made of easy-to-grip thermoplastic elastomer (TPE).

3rd component

Two large surfaces coated with special fibres, resistant long-term to solvents to improve force transmission and work safety.




Together, these features make the **SKDRALL** tools very pleasant to handle and prevent your hands from slipping off the handles or twisting, even if your hands are damp or oily.

Blades



Made of high-grade Chrome Alloy Steel. Through-hardened. Anchored firmly in the haft due to the extra-wide, forged tang. High resistance to bending.

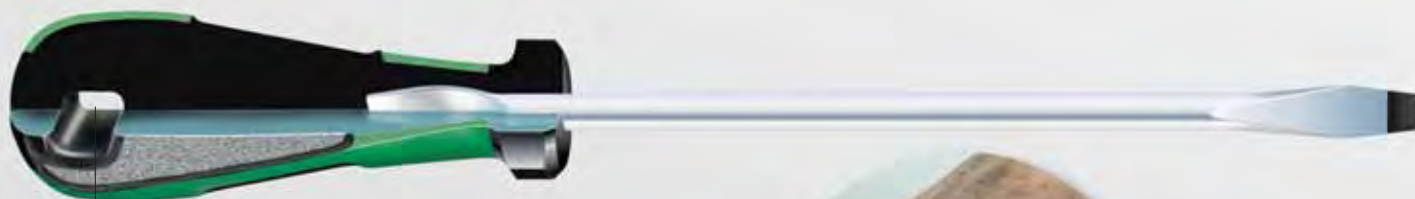

Additional Tommy-bar hole

When things get really tough, the additional Tommy-bar hole will cope with a fair amount of torque.

The ergonomically designed, almost square handle shape gives maximum contact with the handle, maximum leverage and, as a result, maximum non-slip force transmission, even with oily hands.



New freedom of choice – DRALL⁺ screwdrivers



3 handle sizes

The handle sizes for the DRALL⁺ screwdrivers are designed specifically to match the drive profiles.

The profiles

DRALL⁺ is available for the following screwhead profiles:

- ⊖ Slotted
- ⊕ PH cross-head
- ⊕ PZ cross-head
- ⊗ TORX®
- ⊗ TORX® Tamper Resistant with a central bore
- ⦿ Hex with a ball-end
- ⊕ TORQ-SET®

The hand-stop helps stop injuries

Flange-like design. Supports your hand in the direction of the blade to prevent it slipping off the handle. Features integrated anti-roll shape.



Tips

Black, extremely tough, retain their shape. Whether you use the straight-bladed or Phillips type – the crosshatched blade tips will accurately transmit maximum force to the screw head.

Impact-resistant cap

For use under extreme conditions, the DRALL⁺ is also available with a one-piece shaft, an impact head and a metal impact cap.



The elastic handle components

The soft rubber textured thermoplastic elastomer (TPE) fits snugly in the hand. These sections are injection moulded around the hard core and bonded to it inseparably.

The firm handle components

The green zones are made of high-grade, impact-safe polypropylene (PP). The tang is anchored in the core to allow force to be transferred through it.



The multifunctional section

The lower end of the handle is deliberately made extra-long. This enables the thumb and index finger to wrap around more easily and spin the screwdriver.

The transmission zone

The rounded cross-section in the central area combines maximum grip and easy turning.



VDE insulated Screwdrivers

High-grade materials and durability testing guarantee absolute safety when working on AC systems up to 1000 V (effective voltage) or 1500 V DC.



4691 DRALL⁺ set of screwdrivers

Set of 7 DRALL⁺ screwdrivers.

Content:

- ⊖ 4620: size 1 (0.6 x 3.5 x 75 mm)
- size 2 (0.8 x 4.0 x 100 mm)
- size 3 (1.0 x 5.5 x 125 mm)
- size 4 (1.2 x 6.5 x 150 mm)

⊖ 4628: size 1 (0.4 x 2.5 x 60 mm)

⊕ 4630: size 1; size 2



Code	g	⊠
964691 10	620	1

4692 DRALL⁺ set of screwdrivers

Set of 8 DRALL⁺ screwdrivers.

Content:

- ⊖ 4620: size 1 (0.6 x 3.5 x 75 mm)
- size 2 (0.8 x 4.0 x 100 mm)
- size 3 (1.0 x 5.5 x 125 mm)
- size 4 (1.2 x 6.5 x 150 mm)
- size 5 (1.6 x 8.0 x 175 mm)

⊕ 4630: size 1; size 2; size 3



Code	g	⊠
964692 10	870	1

4693 DRALL⁺ set of screwdrivers

Set of 9 DRALL⁺ screwdrivers.

Content:

- ⊖ 4622: size 1 (1.0 x 5.5 x 100 mm)
- size 2 (1.2 x 6.5 x 125 mm)
- size 3 (1.2 x 8.0 x 150 mm)
- size 4 (1.6 x 10.0 x 175 mm)

⊖ 4628: size 1 (0.4 x 2.5 x 60 mm)

⊕ 4632: size 1; size 2

⊖ 4724: size 2 (1.0 x 5.5 x 25 mm)

⊕ 4734: size 2



Code	g	⊠
964693 10	950	1

4696 DRALL⁺ set of screwdrivers

Set of 6 DRALL⁺ screwdrivers with an impact cap.

Content:

⊖ 4622SK:

- size 1 (0.8 x 4.0 x 90 mm)
- size 2 (1.0 x 5.5 x 100 mm)
- size 3 (1.2 x 6.5 x 125 mm)
- size 4 (1.2 x 8.0 x 150 mm)

⊕ 4632SK: size 1; size 2



Code	g	⊠
964696 10	870	1

4697 DRALL⁺ set of screwdrivers

Set of 8 DRALL⁺ screwdrivers.

Content:

- ⊖ 4620: size 1 (0.6 x 3.5 x 75 mm)
- size 2 (0.8 x 4.0 x 100 mm)

⊖ 4622: size 1 (1.0 x 5.5 x 100 mm)

size 2 (1.2 x 6.5 x 125 mm)

size 3 (1.2 x 8.0 x 150 mm)

⊕ 4730: size 1

⊕ 4732: size 2; size 3



Code	g	⊠
964697 10	930	1

4694 DRALL⁺ set of TORX[®] screwdrivers

Set of 9 DRALL⁺ screwdrivers for TORX[®] screws.

Content:

- ⊕ 4650: T8, T9, T10, T15, T20, T25, T27, T30, T40



Code	g	⊠
964694 10	730	1

4699 DRALL⁺ set of TORX[®] screwdrivers

Set of 9 DRALL⁺ screwdrivers for TORX[®] screws

(TORX[®] TAMPER RESISTANT).

Content:

- ⊕ 4656: T8, T9, T10, T15, T20, T25, T27, T30, T40

(with hollow point)



Code	g	⊠
964699 10	740	1

TCS 4620/4630



175 x 350 x 35 mm, 7 pieces

Code	g
968382 78	490

- ⊖ No 4620 size 1 (0.6 x 3.5 x 75 mm); size 2 (0.8 x 4.0 x 100 mm); size 3 (1.0 x 5.5 x 125 mm); size 4 (1.2 x 6.5 x 150 mm)

- ⊖ No 4630 sizes 1; 2; 3



Key to success

TCS 4620/4660VDE+10767



530 x 350 x 35 mm, 27 pieces

Code	g
9683 1168	2080
No 4620	size 1 (0.6 x 3.5 x 75 mm); size 2 (0.8 x 4.0 x 100 mm); size 4 (1.2 x 6.5 x 150 mm); size 5 (1.6 x 8.0 x 175 mm); size 6 (1.6 x 10.0 x 200 mm); size 7 (2.0 x 12.0 x 200 mm)
No 4628	size 1 (0.4 x 2.5 x 60 mm)
No 4630	sizes 1; 2; 3
No 4632	size 4
No 4640	sizes 0; 1; 2
No 4660 VDE	size 1 (0.4 x 2.5 x 75 mm)
No 4724	size 2 (1.0 x 5.5 x 25 mm)
No 4734	size 2
No 4744	size 1
No 10767/9	sizes 1.5; 2; 2.5; 3; 4; 5; 6; 8; 10 mm

TCS 4620/4660VDE



530 x 350 x 40 mm, 18 pieces

Code	g
9683 1179	1689
No 4620	size 1 (0.6 x 3.5 x 75 mm); size 2 (0.8 x 4.0 x 100 mm); size 4 (1.2 x 6.5 x 150 mm); size 5 (1.6 x 8.0 x 175 mm); size 6 (1.6 x 10.0 x 200 mm); size 7 (2.0 x 12.0 x 200 mm)
No 4628	size 1 (0.4 x 2.5 x 60 mm)
No 4630	sizes 1; 2; 3
No 4632	size 4
No 4640	sizes 0; 1; 2
No 4660 VDE	size 1 (0.4 x 2.5 x 75 mm)
No 4724	size 2 (1.0 x 5.5 x 25 mm)
No 4734	size 2
No 4744	size 1

TCS 4621/4734



530 x 350 x 30 mm, 15 pieces

Code	g
9683 1617	1255
No 4621	size 0 (0.4 x 2.5 x 80 mm); size 1 (0.5 x 3.5 x 90 mm); size 2 (0.6 x 4.0 x 100 mm); size 4 (1.0 x 6.5 x 140 mm); size 5 (1.2 x 8.0 x 160 mm)
No 4631	size 1; 2
No 4632	size 1; 2
No 4724	size 2 (1.0 x 5.5 x 25 mm)
No 4734	size 2
No 10506	0.8 x 4.0 x 300 mm
No 10518	1.0 x 5.5 x 410 mm
No 12600	500 g
No 12922E	

TCS 4622/4650+10760+10766



530 x 350 x 40 mm, 36 pieces

Code	g
9683 1196	1895
No 4622	size 1 (1.0 x 5.5 x 100 mm); size 2 (1.2 x 6.5 x 125 mm); size 4 (1.6 x 10.0 x 175 mm); size 5 (2.0 x 12.0 x 200 mm)
No 4630	size 1
No 4632	size 3
No 4650	sizes T6; T7; T8; T9; T10; T15; T20; T25; T27; T30
No 4724	size 2 (1.0 x 5.5 x 25 mm)
No 4734	size 2
No 10760CV/9	sizes 1.5; 2; 2.5; 3; 4; 5; 6; 8; 10 mm
No 10766/9	sizes T8; T9; T10; T15; T20; T25; T27; T30; T40

6

TCS 4650



175 x 350 x 35 mm, 8 pieces


Code	g
96838767	350

No 4650 sizes T8; T9; T10; T15; T20; T25; T27; T30

4620

⊖ Screwdrivers for slotted screws DRALL⁺

DIN ISO 2380-1, -2, DIN 5264, ISO 2380-1, -2, Chrome Alloy Steel, chrome plated, black tips.



Code	size	a mm	b mm	L ₁ mm	L ₂ mm	g	
4620 1035	1	0.6	3.5	75	180	37	10
4620 1040	2	0.8	4.0	100	205	40	10
4620 1055	3	1.0	5.5	125	240	79	10
4620 1065	4	1.2	6.5	150	265	100	10
4620 1080	5	1.6	8.0	175	300	136	10
4620 1100	6	1.6	10.0	200	325	163	5
4620 1120	7	2.0	12.0	250	375	215	5

4621

⊖ Screwdrivers for slotted screws DRALL⁺

parallel blades, as per VSM (Swiss Standard), Chrome Alloy Steel, chrome plated, black tips.



Code	size	a mm	b mm	L ₁ mm	L ₂ mm	g	
4621 1025	0	0.4	2.5	80	185	36	10
4621 1035	1	0.5	3.5	90	195	40	10
4621 1040	2	0.6	4.0	100	205	42	10
4621 1055	3	0.8	5.5	120	235	78	10
4621 1065	4	1.0	6.5	140	255	96	10
4621 1080	5	1.2	8.0	160	275	117	10
4621 1100	6	1.6	10.0	180	305	160	10

4622

⊖ Screwdrivers for slotted screws DRALL⁺

DIN ISO 2380-1, -2, DIN 5264, ISO 2380-1, -2, with hexagon, Chrome Alloy Steel, chrome plated, black tips.



Code	size	a mm	b mm	L ₁ mm	L ₂ mm	g	
4622 1055	1	1.0	5.5	100	215	85	10
4622 1065	2	1.2	6.5	125	240	100	10
4622 1080	3	1.2	8.0	150	275	159	10
4622 1100	4	1.6	10.0	175	300	174	10
4622 1120	5	2.0	12.0	200	325	310	5
4622 1140	6	2.5	14.0	250	375	331	5

4622SK

⊖ Screwdrivers for slotted screws DRALL⁺

DIN ISO 2380-1, -2, DIN 5264, ISO 2380-1, -2, with impact cap and hexagonal shank, Chrome Alloy Steel, chrome plated, black tips.



Code	size	a mm	b mm	L ₁ mm	L ₂ mm	g	
46220040	1	0.8	4.0	90	195	50	10
46220055	2	1.0	5.5	100	215	106	10
46220065	3	1.2	6.5	125	240	135	5
46220080	4	1.2	8.0	150	275	191	5
46220100	5	1.6	10.0	175	300	226	5
46220120	6	2.0	12.0	200	325	267	5
46220140	7	2.5	14.0	250	375	340	5

4724

⊖ Carburettor screwdrivers DRALL

DIN ISO 2380-1, -2, DIN 5264, ISO 2380-1, -2, stubby, Chrome Alloy Steel, chrome plated, black tips.




Code	size	a mm	b mm	L ₁ mm	L ₂ mm	g	
4724 1045	1	0.6	3.5	25	80	34	10
4724 1060	2	1.0	5.5	25	80	32	10
4724 1080	3	1.2	8.0	25	80	39	10

4628

⊖ Electricians screwdrivers for slotted screws DRALL⁺

DIN ISO 2380-1, -2, DIN 5264, ISO 2380-1, -2, Chrome Alloy Steel, chrome plated, black tips.



Code	size	a mm	b mm	L ₁ mm	L ₂ mm	g	
4628 1025	1	0.4	2.5	60	165	38	10
4628 1035	2	0.6	3.5	75	180	40	10
4628 2035	3	0.6	3.5	100	205	41	10
4628 1040	4	0.8	4.0	125	230	46	10
4628 1055	5	1.0	5.5	150	265	92	10
4628 2055	6	1.0	5.5	200	315	102	10

4630

⊕ Cross-head screwdrivers DRALL⁺

Phillips-Recess®, DIN ISO 8764-1, -2, ISO 8764-1, -2, Chrome Alloy Steel, chrome plated, black tips.



Code	PH size	L ₁ mm	L ₂ mm	g	
4630 1000	0	60	165	35	10
4630 1001	1	80	185	44	10
4630 1002	2	100	215	90	10
4630 1003	3	150	275	146	10



Key to success

4631 **Cross-head screwdrivers DRALL⁺**


Phillips-Recess[®], extra long,
DIN ISO 8764-1, -2, ISO 8764-1, -2,
Chrome Alloy Steel, chrome plated, black tips.



Code	PH size	L ₁ mm	L ₂ mm	△ g	
4631 1001	1	250	355	110	1
4631 1002	2	250	365	122	1

4632 **Cross-head screwdrivers DRALL⁺**


with hexagon, Phillips-Recess[®], DIN ISO 8764-1, -2, ISO 8764-1, -2,
Chrome Alloy Steel, chrome plated, black tips.



Code	PH size	L ₁ mm	L ₂ mm	△ g	
4632 1001	1	80	185	45	10
4632 1002	2	100	215	100	10
4632 1003	3	150	275	170	5
4632 1004	4	200	325	237	5

4632SK **Cross-head screwdrivers DRALL⁺**

with impact cap and hexagonal shank, Phillips-Recess[®],
DIN ISO 8764-1, -2, ISO 8764-1, -2, Chrome Alloy Steel, chrome plated,
black tips.



Code	PH size	L ₁ mm	L ₂ mm	△ g	
4632 0001	1	85	190	58	10
4632 0002	2	100	215	130	10
4632 0003	3	150	275	194	5

4734 **Cross-head screwdrivers DRALL**

Phillips-Recess[®], DIN ISO 8764-1, -2,
ISO 8764-1, -2, stubby, Chrome Alloy Steel,
chrome plated, black tips.



Code	PH size	L ₁ mm	L ₂ mm	△ g	
4734 1001	1	25	80	27	10
4734 1002	2	25	80	31	10

4636 **Screwdrivers DRALL⁺**


TORQ-SET[®], hexagonal blade,
phosphatised.



Code	No	L ₁ mm	L ₂ mm	outside ●"	△ g	
4636 0002	2	100	215	1/4	92	5
4636 0004	4	100	215	1/4	93	5
4636 0006	6	100	215	1/4	92	5
4636 0008	8	100	215	1/4	93	5
4636 0010	10	100	215	1/4	93	5
4636 0016	1/4	150	265	5/16	138	5

4640 **Cross-head screwdrivers DRALL⁺**

POZIDRIV/SUPADRIV[®], DIN ISO 8764-1, -2, ISO 8764-1, -2,
Chrome Alloy Steel, chrome plated, black tips.



Code	PZ size	L ₁ mm	L ₂ mm	△ g	
4640 1000	0	60	165	35	10
4640 1001	1	80	185	44	10
4640 1002	2	100	215	89	10
4640 1003	3	150	275	145	5

4744 **Cross-head screwdrivers DRALL**

POZIDRIV/SUPADRIV[®],
DIN ISO 8764-1, -2, ISO 8764-1, -2,
stubby, Chrome Alloy Steel,
chrome plated, black tips.



Code	PZ size	L ₁ mm	L ₂ mm	△ g	
4744 1001	1	25	80	28	10
4744 1002	2	25	80	34	10

4650 **TORX[®] screwdrivers DRALL⁺**

for inside TORX[®] screws,
Chrome Alloy Steel,
chrome plated, black tips.



Code	size	mm	L ₁ mm	L ₂ mm	△ g	
4650 1006	T6	1.6	60	165	35	5
4650 1007	T7	2.0	60	165	35	5
4650 1008	T8	2.3	60	165	35	5
4650 1009	T9	2.5	60	165	35	5
4650 1010	T10	2.7	80	185	40	5
4650 1015	T15	3.3	80	185	38	5
4650 1020	T20	3.8	100	205	46	5
4650 1025	T25	4.4	100	205	50	5
4650 1027	T27	5.0	115	230	90	5
4650 1030	T30	5.5	115	230	90	5
4650 1040	T40	6.6	115	240	131	5
4650 1045	T45	7.8	130	255	136	5

4650L **TORX[®] screwdrivers DRALL⁺**


for inside TORX[®] screws,
extra long, Chrome Alloy Steel,
chrome plated, black tips.



Code	size	mm	L ₁ mm	L ₂ mm	△ g	
4650 1115	T15	3.3	250	355	52	5
4650 1120	T20	3.8	250	355	64	5
4650 1125	T25	4.4	250	355	66	5
4650 1130	T30	5.5	250	365	122	5

4656 TORX® screwdrivers DRALL⁺

with hollow point (TORX® TAMPER RESISTANT),
Chrome Alloy Steel, chrome plated, black tips.



Code	size	mm	L ₁ mm	L ₂ mm	g	
46560008	T8	2.3	60	165	39	5
46560009	T9	2.5	60	165	35	5
46560010	T10	2.7	80	185	39	5
46560015	T15	3.3	80	185	39	5
46560020	T20	3.8	100	205	42	5
46560025	T25	4.4	100	205	46	5
46560027	T27	5.0	115	230	90	5
46560030	T30	5.5	115	230	90	5
46560040	T40	6.6	115	240	120	5
46560045	T45	7.8	130	255	118	5

10507N KK Ball ended hexagon drivers DRALL⁺

for use on hexagon socket head
screws, swivel angle up to 25° each
side, Chrome Alloy Steel, chrome plated, black tips.



Code	mm	L ₁ mm	L ₂ mm	g	
73101003	3	300	405	56	5
73101005	5	300	415	132	5

VDE-insulated Screwdrivers

IEC 60900 C AC 1000 V

High quality materials and stringent tests guarantee
safe use on "live" lines up to 1000 V or 1500 V DC.
Individually tested at 10 000 V.

4695 VDE Screwdriver set DRALL⁺

Set with 6 screwdrivers DRALL⁺,
IEC 60900 C, safety insulated.

AC 1000 V

Content:

⊖ 4660 VDE:


- size 1 (0.4 x 2.5 x 75 mm)
- size 3 (0.6 x 3.5 x 100 mm)
- size 5 (1.0 x 5.5 x 125 mm)
- size 6 (1.2 x 6.5 x 150 mm)

⊕ 4665 VDE: size 1, size 2



Code	g	
96469510	620	1

TCS 4660/4665



175 x 350 x 40 mm, 6 pieces

Code	g
96838766	400

No 4660 VDE size 1 (0.4 x 2.5 x 75 mm);
size 3 (0.6 x 3.5 x 100 mm);
size 5 (1.0 x 5.5 x 125 mm);
size 6 (1.2 x 6.5 x 150 mm)

No 4665 VDE size 1; 2

4660 VDE Electricians screwdrivers DRALL⁺

IEC 60900 C, safety insulated, blade gun finished, Chrome Alloy Steel.



Code	size	a mm	b mm	L ₁ mm	L ₂ mm	g	
46601025	1	0.4	2.5	75	180	43	10
46601030	2	0.5	3.0	100	205	39	10
46601035	3	0.6	3.5	100	205	42	10
46601040	4	0.8	4.0	100	205	46	10
46601055	5	1.0	5.5	125	240	90	10
46601065	6	1.2	6.5	150	265	115	10
46601080	7	1.2	8.0	175	300	170	10

4665 VDE Cross-head screwdrivers DRALL⁺

Phillips-Recess®, IEC 60900 C,
safety insulated, blade gun finished,
Chrome Alloy Steel.



Code	PH size	L ₁ mm	L ₂ mm	g	
46651000	0	60	165	35	10
46651001	1	80	185	47	10
46651002	2	100	215	89	10
46651003	3	150	275	159	10

4670 VDE Cross-head screwdrivers DRALL⁺

POZIDRIV/SUPADRIV®,
IEC 60900 C, safety insulated,
blade gun finished,
Chrome Alloy Steel.



Code	PZ size	L ₁ mm	L ₂ mm	g	
46701000	0	60	165	36	10
46701001	1	80	185	46	10
46701002	2	100	215	89	10



Key to success

3K DRALL Screwdrivers

4891 3K DRALL set of screwdrivers

Set of 6 3K DRALL screwdrivers.

Content:

- ⊖ 4820: 0.6 x 3.5 x 75 mm
0.8 x 4.0 x 100 mm
1.0 x 5.5 x 125 mm
1.2 x 6.5 x 150 mm
- ⊕ 4830: size 1; size 2



Code	g	
96489110	530	1

4892 3K DRALL set of screwdrivers

Set of 8 3K DRALL screwdrivers.

Content:

- ⊖ 4820: 0.6 x 3.5 x 75 mm
0.8 x 4.0 x 100 mm
1.0 x 5.5 x 125 mm
1.2 x 6.5 x 150 mm
1.6 x 8.0 x 175 mm
- ⊕ 4830: size 1; size 2; size 3



Code	g	
96489210	745	1

4899 3K DRALL set of TORX® screwdrivers

Set of 9 3K DRALL screwdrivers for TORX® screws (TORX® TAMPER RESISTANT).

Content:

- ⊕ 4856: T8; T9; T10; T15; T20; T25; T27; T30; T40 (with hollow point)



Code	g	
96489910	513	1

TCS 4820/4830



175 x 350 x 35 mm, 7 pieces

Code	g
96838184	555

- No 4820** 0.6 x 3.5 x 75 mm;
0.8 x 4.0 x 100 mm;
1.0 x 5.5 x 125 mm;
1.2 x 6.5 x 150 mm
- No 4830** sizes 1; 2; 3

TCS 4724/4840+10767




530 x 350 x 45 mm, 24 pieces

Code	g
96830706	1755

- No 4628** size 1 (0.4 x 2.5 x 60 mm)
- No 4724** size 2 (1.0 x 5.5 x 25 mm)
- No 4734** size 2
- No 4744** size 1
- No 4820** 0.6 x 3.5 x 75 mm;
0.8 x 4.0 x 100 mm;
1.2 x 6.5 x 150 mm;
1.6 x 10.0 x 200 mm;
2.0 x 12.0 x 250 mm
- No 4830** sizes 1; 2; 3
- No 4840** size 1
- No 10767/9** sizes 1.5; 2; 2.5; 3; 4; 5; 6; 8; 10 mm
- No 7756**
- No 12922E**

4820 3K DRALL screwdrivers for slotted screws

DIN 5265, ISO 2380, Chrome Alloy Steel, matt chrome plated, black tips.



Code	a mm	b mm	L ₁ mm	L ₂ mm	g	
48201035	0.6	3.5	75	170	23	10
48201040	0.8	4.0	100	195	32	10
48202055	1.0	5.5	125	220	58	10
48201065	1.2	6.5	150	265	100	10
48201080	1.6	8.0	175	290	118	10
48201100	1.6	10.0	200	315	158	5
48202100	2.0	12.0	250	375	218	5

4830 3K DRALL cross-head screwdrivers

Phillips-Recess®, DIN 5262, ISO 8764, Chrome Alloy Steel, matt chrome plated, black tips.



Code	PH size	L ₁ mm	L ₂ mm	g	
48301000	0	60	155	28	10
48301001	1	80	175	33	10
48301002	2	100	215	70	10
48301003	3	150	275	126	5
48301004	4	200	325	251	5

4840 3K DRALL cross-head screwdrivers

POZIDRIV/SUPADRIV®,
DIN 5262, ISO 8764,
Chrome Alloy Steel,
matt chrome plated, black tips.



Code	PZ size	L ₁ mm	L ₂ mm	△△ g	
4840 1001	1	80	175	33	10
4840 1002	2	100	215	70	10

TCS 4856



175 x 350 x 40 mm, 7 pieces

Code	△△ g
9683 87 55	447

No 4856 sizes T8; T9; T10; T15; T20; T25; T30

4856 3K DRALL TORX® screwdrivers

with hollow point
(TORX® TAMPER RESISTANT),
Chrome Alloy Steel,
matt chrome plated, black tips.



Code	size	mm	L ₁ mm	L ₂ mm	△△ g	
4856 0006	T6*	1.6	50	145	45	5
4856 0007	T7	2.0	50	145	37	5
4856 0008	T8	2.3	60	155	50	5
4856 0009	T9	2.5	60	155	50	5
4856 0010	T10	2.7	80	175	26	5
4856 0015	T15	3.3	80	175	52	5
4856 0020	T20	3.8	100	215	32	5
4856 0025	T25	4.4	100	215	55	5
4856 0027	T27	5.0	115	230	58	5
4856 0030	T30	5.5	115	230	63	5
4856 0040	T40	6.6	115	240	86	5

* without hollow point



Electronics Screwdrivers

4797 Electronics screwdrivers set

7 pieces

Content:

- ⊖ 4751: size 4 (0.3 x 1.5 x 40 mm)
size 6 (0.4 x 2.0 x 60 mm)
size 7 (0.4 x 2.5 x 75 mm)
size 8 (0.5 x 3.0 x 75 mm)

- ⊕ 4752: size 00, size 0, size 1



Code	△△ g	
9647 97 10	285	1

4751 ⊖ Screwdrivers for slotted screws



Code	size	a mm	b mm	L ₁ mm	L ₂ mm	△△ g	
4751 0001	1	0.16	0.8	40	140	12	5
4751 0002	2	0.18	1.0	40	140	12	5
4751 0003	3	0.25	1.2	40	140	12	5
4751 0004	4	0.3	1.5	40	140	19	5
4751 0005	5	0.3	1.8	60	160	10	5
4751 0006	6	0.4	2.0	60	160	19	5
4751 0007	7	0.4	2.5	75	175	14	5
4751 0008	8	0.5	3.0	75	175	16	5

4752 ⊕ Cross-head screwdrivers

Phillips-Recess®.



Code	size	L ₁ mm	L ₂ mm	⊕ M	americ. No.	∅ mm	△△ g	
4752 0010	00	40	140	-	-	2.5	19	5
4752 0020	0	60	160	-2	0-1	3	13	5
4752 0001	1	80	180	2-3	2-4	4.5	24	5

4753 ⊙ Hexagon socket screwdrivers



Code	⊙ mm/"	L ₁ mm	L ₂ mm	△△ g	
4753 0007	0.7 / 0.028	40	140	14	5
4753 0009	0.9 / 0.035	40	140	14	5
4753 0013	1.3 / 0.050	40	140	19	5
4753 0015	1.5	50	150	18	5



Key to success

4798 Set of reversible screwdrivers

11 pieces
Content:
⊖ 0.6 x 3.5; 0.8 x 4.0; 1.0 x 5.5;
1.2 x 6.5 mm
⊕ sizes 1; 2
⊕ sizes 3; 4; 5; 6 mm
⊕ sizes 3; 4; 5; 6 mm (ball end)
⊕ T10; T15; T20; T25; T30; T40



Code	g	⊞
96479801	675	1

10554 EURO voltage tester

built to conform to the new EN standard, tested to conform to the currently valid VDE GS standard, with plastic handle, AC 125–250 V.



Code	a mm	b mm	L mm	g	⊞
77450001	1	3.5	190	37	10

ES 12500N/7



175 x 350 x 39 mm, 7 pieces

Code	g
96838200	1060

No 12500N	sizes 7; 8; 9; 10; 11; 12; 13 mm
83813085	Empty tray

12500N Nut spinners DRALL⁺

DIN 3125, Chrome Vanadium, chrome plated.



Code	mm	L ₁ mm	L ₂ mm	g	⊞
43091004	4	125	230	58	10
43091045	4.5	125	230	49	10
43091005	5	125	230	58	10
43091055	5.5	125	230	58	10
43091006	6	125	240	98	10
43091007	7	125	240	114	10
43091008	8	125	240	115	10
43091009	9	125	240	118	10
43091010	10	125	240	122	10
43091011	11	125	250	160	5
43091012	12	125	250	168	5
43091013	13	125	250	170	5

12506 Nut spinners DRALL


flexible, max. torque 8 N m, matt chrome plated.



Code	mm	L ₁ mm	L ₂ mm	g	⊞
43100206	6	150	265	167	10
43100207	7	150	265	168	10
43100208	8	150	265	170	10

12507-2K T-handled nut spinners


with 2-component T-handle, Chrome Vanadium, matt chrome plated.



Code	mm	L ₁ mm	L ₂ mm	g	⊞
43232060	6	200	224	83	10
43232070	7	200	234	133	10
43232080	8	200	234	135	10
43232090	9	200	234	137	10
43232100	10	200	234	141	10
43232110	11	200	240	169	5
43232120	12	200	240	171	5
43232130	13	200	240	176	5

10546 Offset screwdrivers

DIN 5200, for slotted screws, centre handle covered with impact proof plastic, Chrome Vanadium, chrome plated.



Code	size	a mm	b mm	L mm	g	⊞
73272001	1	0.6	3.5	90	8	10
73272002	2	0.8	4	100	12	10
73272003	3	1	5.5	125	29	10
73272004	4	1.2	8	150	69	10

10551 Offset screwdrivers

DIN 5208, for recessed head screws, Phillips-Recess®, centre handle covered with impact proof plastic, Chrome Vanadium, chrome plated.



Code	PH size	L mm	g	⊞
73282012	1 x 2	125	30	10
73282023	2 x 3	150	72	10

6

10760CV R/8 Hexagon key wrenches

on ring, for socket head screws, Chrome Vanadium, nickel-plated.



Code	g	Box
9643 1521	260	1

Content: 2; 2.5; 3; 4; 5; 6; 8; 10 mm

Hexagon key wrenches

in holder, DIN ISO 2936 (metric), for socket head screws, Chrome Vanadium, nickel-plated.



Code	No	g	Box
9643 1501	10760CV/9¹⁾	245	1
9643 5501	10760aCV/10Pc²⁾	269	1
9643 5502	10760aCV/13³⁾	124	1


¹⁾ Content: 1.5; 2; 2.5; 3; 4; 5; 6; 8; 10 mm

²⁾ Content: 1/16; 5/64; 3/32; 1/8; 5/32; 3/16; 7/32; 1/4; 5/16; 3/8" (in plastic-wallet)

³⁾ Content (in two holders): 0.028; 0.035; 0.050; 1/16; 5/64; 3/32; 7/64; 1/8; 9/64; 5/32; 3/16; 7/32; 1/4"

10760CV Hexagon key wrenches

DIN ISO 2936 (metric), for socket head screws, Chrome Vanadium, nickel-plated (sizes 0.7; 0.9; 1.3 mm gunmetal finish).



Code	mm/"	L ₁ mm	L ₂ mm	g	Box
43 1500 70	0.7/0.028	8	32	1	10
43 1500 90	0.9/0.035	10	32	1	10
43 1501 30	1.3/0.050	12	40	1	10
43 1501 50	1.5	14	45	1	10
43 1500 02	2	16	50	2	10
43 1502 50	2.5	18	56	3	10
43 1500 03	3	20	63	4	10
43 1503 50	3.5	22	66	7	10
43 1500 04	4	25	70	10	10
43 1500 05	5	28	80	18	10
43 1500 06	6	32	90	29	10
43 1500 07	7	34	95	42	10
43 1500 08	8	36	100	59	10
43 1500 09	9	38	105	80	10
43 1500 10	10	40	112	103	10
43 1500 11	11	42	119	130	10
43 1500 12	12	45	125	169	5
43 1500 14	14	56	140	261	5
43 1500 17	17	63	160	442	5
43 1500 19	19	70	180	603	5
43 1500 22	22	80	200	938	1
43 1500 24	24	90	224	1248	1
43 1500 27	27	100	250	1692	1
43 1500 30	30	112	280	2434	1
43 1500 32	32	125	315	3117	1
43 1500 36	36	140	355	4430	1

10760aCV Hexagon key wrenches

Code	mm/"	L ₁ mm	L ₂ mm	g	Box
43 1500 70	0.7/0.028	8	32	1	10
43 1500 90	0.9/0.035	10	32	1	10
43 1501 30	1.3/0.050	12	40	1	10
43 5500 03	3/64	14	45	1	10
43 5500 04	1/16	15	45	1	10
43 5500 05	5/64	16	50	2	10
43 5500 06	3/32	17	51	3	10
43 5500 07	7/64	20	54	4	10
43 5500 08	1/8	22	57	5	10
43 5500 09	9/64	23	63	7	10
43 5500 10	5/32	25	65	10	10
43 5500 12	3/16	29	70	15	10
43 5500 14	7/32	32	80	23	10
43 5500 16	1/4	32	87	32	10
43 5500 18	9/32	35	95	45	10
43 5500 20	5/16	40	98	59	10
43 5500 22	11/32	41	105	75	10
43 5500 24	3/8	45	110	95	10
43 5500 28	7/16	48	124	143	10
43 5500 32	1/2	50	133	200	5
43 5500 34	9/16	57	152	380	5
43 5500 36	5/8	59	160	380	5
43 5500 40	3/4	70	180	605	5
43 5500 44	7/8	80	200	945	1





Key to success

10765/9 Hexagon key wrenches

for socket head screws, DIN ISO 2936, extra long, in holder, Chrome Vanadium, nickel-plated.

Content:
1.5; 2; 2.5; 3; 4; 5; 6; 8; 10 mm



Code	g	g	g
96432101	410	5	

10765 Hexagon key wrenches

DIN ISO 2936, for socket head screws, extra long, Chrome Vanadium, nickel-plated.



Code	mm	L ₁ mm	L ₂ mm	g	g
43210015	1.5	14	90	3	10
43210002	2	16	100	3	10
43210025	2.5	18	112	5	10
43210003	3	20	126	9	10
43210004	4	25	140	17	10
43210005	5	28	160	31	10
43210006	6	32	180	50	10
43210007	7	34	190	74	10
43210008	8	36	200	100	10
43210009	9	38	210	135	10
43210010	10	40	224	179	10
43210012	12	45	250	287	5
43210014	14	56	280	440	5
43210017	17	63	320	742	5
43210019	19	70	360	1048	5

Key wrenches

for inside TORX® screws, in holder, Chrome Vanadium, chrome plated.



Code	No	g	g
96432201	10766/6 ¹⁾	101	1
96432202	10766/9 ²⁾	120	1

¹⁾ Content: sizes T15; T20; T25; T27; T30; T40

²⁾ Content: sizes T8; T9; T10; T15; T20; T25; T27; T30; T40

10766 Key wrenches

for inside TORX® screws, Chrome Vanadium, chrome plated.



Code	size	mm	L ₁ mm	L ₂ mm	g	g
43220006	T6	1.6	16	38	2	10
43220007	T7	2.0	16	41	2	10
43220008	T8	2.3	16	44	3	10
43220009	T9	2.5	16	48	3	10
43220010	T10	2.7	17	51	3	10
43220015	T15	3.3	18	54	5	10
43220020	T20	3.8	19	57	7	10
43220025	T25	4.4	20	60	9	10
43220027	T27	5.0	21	64	15	10
43220030	T30	5.5	24	70	20	10
43220040	T40	6.6	26	76	29	10
43220045	T45	7.8	29	83	42	10
43220050	T50	8.8	32	95	61	10
43220055	T55	11.2	35	108	122	10
43220060	T60	13.2	38	120	185	10

10771/8 Key wrenches

for inside TORX® screws, extra long, with ball end on long arm, swivel angle up to 25° each side, in holder, Chrome Vanadium, gunmetal finish.

Content:
sizes T9; T10; T15; T20; T25; T27; T30; T40



Code	g	g
96432701	290	1

10771 Key wrenches

for inside TORX® screws, extra long, with ball end on long arm, swivel angle up to 25° each side, Chrome Vanadium, gunmetal finish.



Code	size	mm	L ₁ mm	L ₂ mm	g	g
43270010	T10	2.7	23	121	10	5
43270015	T15	3.3	27	136	15	5
43270020	T20	3.8	29	148	20	5
43270025	T25	4.4	33	163	24	5
43270027	T27	5.0	36	176	28	5
43270030	T30	5.5	38	191	30	5
43270040	T40	6.6	43	210	35	5



Official partner of
BMW Motorrad Motorsport

Ball ended hexagon key wrenches

in holder, Chrome Vanadium, gunmetal finish.



Code	No	⚖ g	📦
96432601	10767/9 ¹⁾	420	5
96435701	10767a/8 ²⁾	283	1
96435702	10767a/13 ³⁾	465	1

¹⁾ Content: 1.5; 2; 2.5; 3; 4; 5; 6; 8; 10 mm

²⁾ Content: 5/64; 3/32; 1/8; 5/32; 3/16; 7/32; 1/4; 5/16"

³⁾ Content: 0.050; 1/16; 5/64; 3/32; 7/64; 1/8; 9/64; 5/32; 3/16; 7/32; 1/4; 5/16; 3/8"

10767

Ball ended hexagon key wrenches

for hexagon socket head screws, with ball end on long arm, swivel angle up to 25° each side, Chrome Vanadium, gunmetal finish.



Code	⚙ mm/"	L ₁ mm	L ₂ mm	⚖ g	📦
43570130	1.3/0.050	12	72	1	10
43260015	1.5	14	90	1.5	10
43260002	2	16	100	3	10
43260025	2.5	18	112	5.5	10
43260003	3	20	126	9	10
43260004	4	25	140	18	10
43260005	5	28	160	31	10
43260006	6	32	180	50	10
43260008	8	36	200	100	10
43260010	10	40	224	188	10
43260012	12	45	224	297	10

10767a

Ball ended hexagon key wrenches

Code	⚙ mm/"	L ₁ mm	L ₂ mm	⚖ g	📦
43570130	1.3/0.050	12	72	1	10
43570004	1/16	14	80	1.5	10
43570005	5/64	16	89	3	10
43570006	3/32	18	101	5	10
43570007	7/64	20	111	7	10
43570008	1/8	20	121	9.5	10
43570009	9/64	23	136	13	10
43570010	5/32	25	149	16	10
43570012	3/16	26	163	27	10
43570014	7/32	29	170	42	10
43570016	1/4	31	179	60	10
43570020	5/16	36	189	102	10
43570024	3/8	38	200	164	10

10767H/9

Set: Ball ended hexagon key wrenches

for recessed hexagonal screws, swivel angle up to 25° each side, from size 3 mm with ring, with ball end on long arm, facilitates quick, safe work in awkward places, screws stay on the head once attached, in holder, Chrome Vanadium, gunmetal finish.

Content: 1.5; 2; 2.5; 3; 4; 5; 6; 8; 10 mm



Code	⚖ g	📦
96432602	401	5

10767H

Ball ended hexagon key wrenches

for hexagon key wrenches, swivel angle up to 25° each side, with ball end on long arm, facilitates quick, safe work in awkward places, screws stay on the head once attached, Chrome Vanadium, gunmetal finish.



Code	⚙ mm	L ₁ mm	L ₂ mm	⚖ g	📦
46231003	3	20	126	8	10
46231004	4	25	140	17	10
46231005	5	28	160	30	10
46231006	6	32	180	50	5
46231008	8	36	200	100	5
46231010	10	40	224	175	5

Angled key wrenches in a convenient holder

with various different drivers, internal hexagon, ball-end internal hexagon (metric), TORX®.

Blades are crafted in high-alloy, corrosion-free, chrome nickel steel. Blade points on internal hexagons are chamfered to facilitate insertion into the screw head. 100% greater torque thanks to thickened neck area on ball-end. Holder made of fibreglass reinforced plastic, extremely heavy duty, with an ergonomically shaped grip. Blades are pivotable in the holder up to 270°, making them ideal for work in confined spaces.

10761a*

inch

Content:

5/64; 3/32; 7/64; 1/8; 9/64; 5/32; 3/16; 7/32; 1/4"



Code	⚖ g	📦
43360002	108	1

* to be discontinued

10761TX*

TORX®

Content: T9; T10; T15; T20; T25; T27; T30; T40

Code	⚖ g	📦
43360003	148	1

* to be discontinued

10761KK*

Ball end metric

Content: 4; 5; 6; 8; 10 mm

Code	⚖ g	📦
43360004	230	1

* to be discontinued



Key to success

ES 10768/6




350 x 350 x 37 mm, 6 pieces

Code	⚖️ g
96838119	780

 No 10768	sizes 3; 4; 5; 6; 8; 10 mm
83812042	Empty tray 209

10768 T-handled screwdrivers

for socket head screws, Chrome Vanadium, matt chrome plated, black tips.






Code	⚙️ mm	L ₁ mm	L ₂ mm	⚖️ g	📦
43250020	2	100	116	10	10
43250025	2.5	100	116	10	10
43250030	3	150	166	20	10
43250040	4	150	175	40	10
43250050	5	200	225	60	10
43250060	6	200	225	80	10
43250080	8	200	235	150	5
43250100	10	200	235	210	5

TCS 10765/10768/12507/19




530 x 350 x 30 mm, 19 pieces

Code	⚖️ g
96830621	1640

 No 10765/9	sizes 1.5; 2; 2.5; 3; 4; 5; 6; 8; 10 mm
 No 10768	sizes 2.5; 3; 4; 5; 6; 8; 10 mm
 No 12507-2K	sizes 8; 10; 13 mm

10768-2K Hexagon key wrenches

with 2-component T-handle, for socket head screws, with two tips, Chrome Vanadium, matt chrome plated, black tips.




Code	⚙️ mm	L ₁ mm	L ₂ mm	⚖️ g	📦
43252020	2	100	125	33	10
43252025	2.5	100	125	42	10
43252030	3	150	174	42	10
43252040	4	150	176	51	10
43252050	5	200	227	73	10
43252060	6	200	228	92	10
43252080	8	200	235	178	5
43252100	10	200	235	247	5

ES 10769/7



175 x 350 x 35 mm, 7 pieces

Code	⚖️ g
96838120	450

 No 10769	sizes T10; T15; T20; T25; T27; T30; T40
83812043	Empty tray 116

10769 TORX®-T-handled screwdrivers

for inside TORX® screws, shaft nickel-plated and chrome plated, tips hardened, Chrome Vanadium, matt chrome plated, black tips.



Code	size	⚙️ mm	L ₁ mm	L ₂ mm	⚖️ g	📦
43290008	T8	2.3	80	96	10	5
43290009	T9	2.5	80	96	10	5
43290010	T10	2.7	100	116	10	5
43290015	T15	3.3	100	116	20	10
43290020	T20	3.8	100	125	30	10
43290025	T25	4.4	110	135	40	10
43290027	T27	5	110	135	50	10
43290030	T30	5.5	130	155	60	10
43290040	T40	6.6	130	165	100	10
43290045	T45	7.8	130	165	120	10
43290050	T50	8.8	130	165	140	5

TCS 10766+10769/15



350 x 350 x 30 mm, 15 pieces

Code	g
96830618	730



No 10766/6 sizes T15; T20; T25; T27; T30; T40



No 10769 sizes T8; T10; T15; T20; T25; T30; T40; T45; T50

ES 10769B/7



175 x 350 x 35 mm, 7 pieces

Code	g
96838129	450



No 10769B sizes T10; T15; T20; T25; T27; T30; T40

83812043	Empty tray	116
-----------------	------------	-----

10769B

TORX® screwdrivers with T-handle

with hollow point (TORX® TAMPER RESISTANT), shaft nickel-plated and chrome plated, tips hardened, Chrome Vanadium, matt chrome plated, black tips.



Code	size	mm	L ₁ mm	L ₂ mm	g	
43300010	T10	2.7	100	116	20	5
43300015	T15	3.3	100	116	20	5
43300020	T20	3.8	100	125	30	5
43300025	T25	4.4	110	135	40	5
43300027	T27	5.0	110	135	50	5
43300030	T30	5.5	130	155	50	5
43300040	T40	6.6	130	165	100	5
43300045	T45	7.8	130	165	110	5

10757

Four-sided bradawl

for punching and preparing leather, plastics and other soft materials and for marking holes in wood to prevent wood screws slipping off the mark.



Code	L mm	Blade mm	g	
77591000	200	6 x 100	100	1



Official partner of
BMW Motorrad Motorsport

