


NOTE: Zinc 3Cr. Plated and Black 3Cr. Plated are RoHS compliant trivalent finishes

HEX SOCKET CAP SCREW ISO 4762 / JIS B1176 / DIN 912



- **Material · plating**
 Steel 12.9 (~M20) / Black
 Steel 10.9 (M22~) / Black

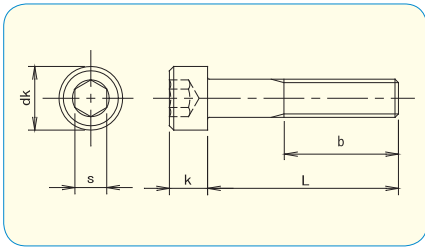


How to order or inquire: R830-912-12- diameter x length (up to M20)
 How to order or inquire: R830-912-10- diameter x length (M22 and up)
 Examples: R830-912-12 3x10, R830-912-10 24x35

	M1.6	M2	M2.5	M2.6	M3	M4	M5	M6	M8	M10	M12
dk	3	3.8	4.5	4.5	5.5	7	8.5	10	13	16	18
k	1.6	2	2.5	2.6	3	4	5	6	8	10	12
s	1.5	1.5	2	2	2.5	3	4	5	6	8	10
b	15	16	17	17	18	20	22	24	28	32	36

pcs / Box

d L	M1.6	M2	M2.5	M2.6	M3	M4	M5	M6	M8	M10	M12
3	1,000	500	500	500	500						
4	1,000	500	500	500	500	500	500				
5	1,000	500	500	500	500	500	500	200			
6	1,000	500	500	500	500	500	500	200			
8	1,000	500	500	500	500	500	500	200	100		
10	1,000	500	500	500	500	500	500	200	100	100	
12		500	500	500	500	500	500	200	100	100	100
14		500	500	500	500	500	500	200	100	100	
15		500	500	500	500	500	500	200	100	100	100
16		500	500	500	500	500	500	200	100	100	100
18		500	500	500	500	500	500	200	100	100	100
20		500	500	500	500	500	500	200	100	100	100
22					500	200	200	200	100	100	100
25					200	200	200	200	100	100	100
28					200	200	200	200	100	100	100
30					200	200	200	100	100	100	100
35					200	200	200	100	100	100	50
40					200	200	200	100	100	100	50
45					200	200	200	100	100	100	50
50					200	200	200	100	100	50	50
55						200	200	100	100	50	50
60						200	200	100	100	50	50
65						200	200	100	100	50	50
70						200	200	100	100	50	50
75								100	100	50	50
80								100	100	50	50
85								100	100	50	50
90								100	100	50	25
95								100	50	50	25
100								100	50	50	25
105									50	50	25
110					300				50	50	25
115									50	50	25
120									50	50	25
125									50	25	25
130									50	25	25
140									50	25	25
150									50	30	25
155											
160										30	25
165											
170										30	25
180										30	25
190										30	25
200										30	25

HEX SOCKET CAP SCREW ISO 4762 / JIS B1176 / DIN 912

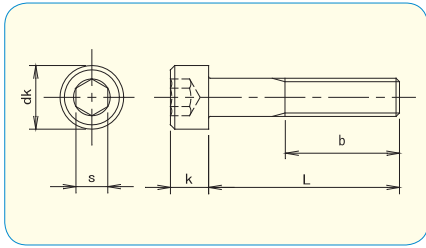

- **Material · plating**
 Steel 12.9 (~M20) / Black
 Steel 10.9 (M22~) / Black



How to order or inquire: R830-912-12- diameter x length (up to M20)
 How to order or inquire: R830-912-10- diameter x length (M22 and up)
 Examples: R830-912-12 3x10, R830-912-10 24x35

	M1.6	M2	M2.5	M2.6	M3	M4	M5	M6	M8	M10	M12
dk	3	3.8	4.5	4.5	5.5	7	8.5	10	13	16	18
k	1.6	2	2.5	2.6	3	4	5	6	8	10	12
s	1.5	1.5	2	2	2.5	3	4	5	6	8	10
b	15	16	17	17	18	20	22	24	28	32	36


	M14	M16	M20	M24	M36
dk	21	24	30	36	54
k	14	16	20	24	36
s	12	14	17	19	27
b	40	44	52	60	84

pcs / Box

L \ d	M14	M16	M20	M24	M36
20	50				
25	50	50			
30	50	50		20	
35	50	40		20	
40	50	40	40		
45	50	40	40		
50	50	30	35		
55	40	30	30		
60	40	30	30		1
65	40	25	30		
70	40	25	25		1
75	40	25	25		
80	40	25	25		1
85	30	25	25		
90	30	20	25		1
95	30	20	25		
100	30	20	20		1
105		20			
110		20			1
115		15			
120		15			1
125		15			
130		15			1
140		15			1
150		15			1
160					1
170					1
180					1
190					1
200					1
210					1
220					1
230					1
240					1
250					1
260					1
280					1
300					1

NOTE: Zinc 3Cr. Plated and Black 3Cr. Plated are RoHS compliant trivalent finishes

HEX SOCKET CAP SCREW ISO 4762 / JIS B1176 / DIN 912

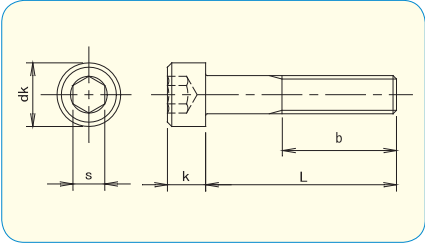

- **Material · plating**
 Steel 10.9 / Zinc 3Cr. Plated
 Steel 10.9 / Zinc Black 3Cr. Plated



How to order or inquire: R830-912-10-finish code diameter x length

Example: R830-912-10-CR3 4x10


Finish codes: CR3 for Zinc 3Cr. Plated, CR3B for Black 3Cr. Plated

	M2	M2.5	M2.6	M3	M4	M5	M6	M8	M10	M12
dk	3.8	4.5	4.5	5.5	7	8.5	10	13	16	18
k	2	2.5	2.6	3	4	5	6	8	10	12
s	1.5	2	2	2.5	3	4	5	6	8	10
b	16	17	17	18	20	22	24	28	32	36



d L											pcs / Box
		M2	M2.5	M2.6	M3	M4	M5	M6	M8	M10	M12
3		500	500	500	500						
4		500	500	500	500	500					
5		500	500	500	500	500	500				
6		500	500	500	500	500	500	500			
8		500	500	500	500	500	500	500			
10		500	500	500	500	500	500	500	100	100	
12		500	500	500	500	500	500	500	100	100	
14		500	500	500	500	500	500	500	100	100	
15		500	500	500	500	500	200	200	100	100	
16		500	500	500	500	500	200	200	100	100	
18		500	500	500	500	500	200	200	100	100	
20		500	500	500	500	200	200	200	100	100	
25			500		500	200	200	200	100	100	50
30					500	200	200	200	100	50	50
35					500	200	200	100	100	50	50
40					500	200	200	100	100	50	50
45					500	200	200	100	100	50	50
50					200	200	200	100	100	50	
55					200	200	200	100	50	50	
60					200	200	200	100	50	50	40
65							200	100			
70						200	200	100		50	
75						200		100			
80							100	100			
85						100					
90								100			
100								100	50	30	
110											
120									50		

HEX SOCKET CAP SCREW ISO 4762 / JIS B1176 / DIN 912

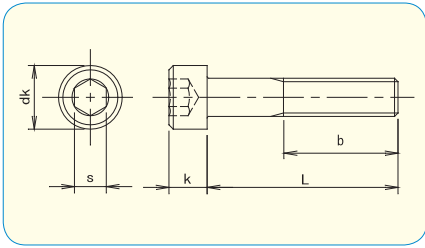

● **Material**
Stainless Steel A2



How to order or inquire: R830-DIN 912A2 diameter x length

Example: R830-DIN 912A2 4x16


Material codes: A2 for Stainless Steel A2

	M1.6	M2	M2.5	M2.6	M3	M4	M5	M6	M8	M10
dk	3	3.8	4.5	4.5	5.5	7	8.5	10	13	16
k	1.6	2	2.5	2.6	3	4	5	6	8	10
s	1.5	1.5	2	2	2.5	3	4	5	6	8
b	15	16	17	17	18	20	22	24	28	32



		pcs / Box									
L \ d	M1.6	M2	M2.5	M2.6	M3	M4	M5	M6	M8	M10	
3	1,000	1,000	1,000	1,000	1,000						
4	1,000	1,000	1,000	1,000	500	1,000					
5	1,000	1,000	1,000	1,000	500	500	500				
6	1,000	1,000	1,000	1,000	500	500	500	500			
8	1,000	1,000	1,000	1,000	500	500	500	200	100		
10	1,000	1,000	1,000	1,000	500	500	500	200	100	100	
12	1,000	1,000	1,000	1,000	500	500	500	200	100	100	
14		1,000	1,000	1,000	500	500	500	200	100	100	
15		1,000	1,000	1,000	500	500	500	200	100	100	
16		1,000	1,000	1,000	500	500	200	200	100	100	
18		1,000	1,000	1,000	500	500	200	200	100	100	
20		1,000	1,000	1,000	500	500	200	200	100	100	
22					200	500	200	200	100	100	
25		1,000	1,000	1,000	200	500	200	200	100	100	
28					200	200	200	200	100	100	
30		1,000	1,000	1,000	200	200	200	200	100	50	
35					200	200	200	200	100	50	
40		1,000	1,000	1,000	200	200	200	200	100	50	
45					200	200	100	200	100	50	
50					200	200	100	200	100	50	
55					200	200	100	100	50	50	
60					200	200	100	100	50	50	
65					200	200	100	100	50	50	
70					200	200	100	100	50	40	
75					200	200	100	100	50	40	
80					200	200	100	100	50	40	
85					200	200	100	100	50	40	
90					200	200	100	100	50	30	
95					200	100	100	100	50	30	
100					200	100	100	100	50	30	
105							100	100	50	25	
110						100	100	100	50	30	
115						100	100	100	50	25	
120						100	100	100	50	30	
125							100	100	50	25	
130						100	100	100	50	30	
140						100	100	100	50	30	
150						100	100	100	50	30	
155							100		50	30	
160							100	100	50	30	
165										30	
170							100	100	50	30	
180							100	100	70	30	
190							100	100	70	30	
200							100	100	70	30	
210									70		
220									50	30	
230									50	30	
240											
250									50	30	

HEX SOCKET CAP SCREW ISO 4762 / JIS B1176 / DIN 912

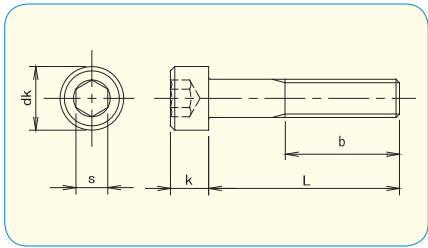

● **Material**
Stainless Steel A2



How to order or inquire: R830-DIN 912A2 diameter x length


Example: R830-DIN 912A2 4x16

Material codes: A2 for Stainless Steel A2

	M12	M14	M16	M18	M20	M22	M24	M27	M30	M33	M36
dk	18	21	24	27	30	33	36	40	45	50	54
k	12	14	16	18	20	22	24	27	30	33	36
s	10	12	14	14	17	17	19	19	22	24	27
b	36	40	44	48	52	56	60	66	72	78	84

		pcs / Box										
d	L	M12	M14	M16	M18	M20	M22	M24	M27	M30	M33	M36
12	50											
14	50											
15	50											
16	50											
18	50											
20	50	40	40									
22	50											
25	50	40	50		20							
30	50	40	50	10	20	15	5					
35	50	40	50	10	20	15	5					
40	50	30	40	10	20	15	5					
45	50	30	40	10	15	15	5					
50	40	30	40	10	15	15	5	5	4			
55	40	25	35	10	15	15	5	5	4			
60	30	25	30	10	15	15	5	5	4			
65	30	25	30	10	15	15	5	5	4			
70	30	25	30	10	15	15	5	5	4	1	1	
75	30	25	25	10	12	15	5	5	4	1	1	
80	30	25	25	10	12	15	5	5	4	1	1	
85	30	25	25	10	10	15	5	5	4	1	1	
90	25	25	25	10	10	15	5	5	4	1	1	
95	25	15	20		10	15	5	5	4		1	
100	25	15	20	10	10	15	5	5	4	1	1	
105	25	15	15			15	5					
110	20	15	15	10	10	15	5	5	4	1	1	
115	20	15	15			15	5					
120	20	15	12	10	8	15	5	5	4	1	1	
125	20	15	15			10	5					
130	20	15	12	10	8	10	5	5	4	1	1	
140	20	15	12	10	8	10	5	5	4	1	1	
150	20	15	12	10	6	10	5	5	4	1	1	
160	20	15	12	10	6	10	5	5	4		1	
170	20	15	12	10	6	10	5	5	4		1	
180	20	15	12	10	6	10	5	5	4		1	
190	20	15	12		6	10	5	5	3		1	
200	20	15	10	10	6	10	5	5	3		1	
210			10									
220	20		10									
230	20		10		6		5		3			
240	20		10									
250	20	20	10		6	10	5	5	3		1	
260			10									
280							5					
300	20	15	10		5	10	5	5	3		1	

HEX SOCKET CAP SCREW ISO 4762 / JIS B1176 / DIN 912

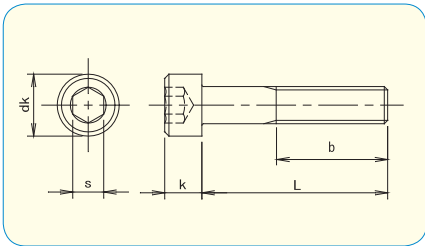

● **Material**

SUS 316L

Stainless Steel A4



How to order or inquire: R830-DIN 912-material code diameter x length

Example: R830-DIN 912-316L 4x16

Material codes: 316L for Stainless Steel 316L

	M3	M4	M5	M6	M8	M10	M12	M14
dk	5.5	7	8.5	10	13	16	18	21
k	3	4	5	6	8	10	12	14
s	2.5	3	4	5	6	8	10	12




		pcs / Box						
L \ d	M3	M4	M5	M6	M8	M10	M12	M14
4	500	500						
5	500	500	300					
6	500	500	300	300				
8	500	500	300	300				
10	500	500	300	300	200			
12	500	500	300	300	200			
14	500	500	300	300	200			
15	500	500	300	300	200	100	100	
16	500	500	300	300	200	100	100	
18	500	500	300	300	200			
20	500	500	300	300	200	100	100	
25	* 500	500	300	300	200	100	100	30
30	* 500	* 500	* 300	300	200	100	100	30
35	* 500	* 500	* 300	* 300	200	100	100	30
40	* 500	* 500	* 300	* 300	* 200	100	100	30
45	* 500	* 500	* 300	* 300	* 200	* 100	100	30
50	* 500	* 500	* 300	* 300	* 200	* 100	* 100	30
55		* 500	* 300	* 300	* 200	* 100	* 100	
60		* 500	* 300	* 300	* 200	* 100	* 100	* 30
65		* 500	* 300	* 300	* 200	* 100	* 100	
70		* 500	* 300	* 300	* 200	* 100	* 100	
75		* 500	* 300	* 300	* 200	* 100	* 100	
80		* 500	* 300	* 300	* 200	* 100	* 100	
85				* 300	* 200		* 100	
90				* 300	* 200	* 100	* 100	
95				* 300	* 200			
100				* 300	* 200	* 100	* 100	
110						* 100	* 100	
120						* 100	* 100	
130						* 100	* 100	
140						* 100	* 100	
150						* 100	* 100	

* ... Half thread



HEX SOCKET CAP SCREW ISO 4762 / JIS B1176 / DIN 912

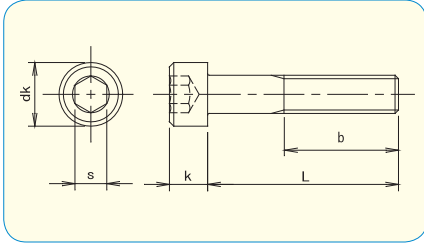

How to order or inquire: R830-DIN 912-material code diameter x length

Example: R830-DIN 912-TI 4x16

Material codes: TI for Titanium

	M3	M4	M5	M6	M8	M10	M12	M16
dk	5.5	7	8.5	10	13	16	18	24
k	3	4	5	6	8	10	12	16
s	2.5	3	4	5	6	8	10	14

● Material **TITAN**

pcs / Box

L \ d	M3	M4	M5	M6	M8	M10	M12
6	200	200					
8	200	200	100	100			
10	200	200	100	100			
12	200	200	100	100			
15	200	200	100	100	100	50	
16	200	200	100	100	100	50	
20	200	200	100	100	100	50	
25	* 200	200	100	100	100	50	30
30		* 200	* 100	100	100	50	30
35		* 200	* 100	* 100	100	50	30
40		* 200	* 100	* 100	* 100	50	30
45			* 100	* 100	* 100	* 50	30
50			* 100	* 100	* 100	* 50	30
55			* 100	* 100	* 100	* 50	* 30
60			* 100	* 100	* 100	* 50	* 30



* ... Half thread

● Material · plating Steel 12.9 / **DISGO**

pcs / Box

L \ d	M6	M8	M10	M12	M16
10	200	100			
12	200	100			
14	200	100			
15	200	100			
16	200	100	100		
18	200	100			
20	200	100	100	50	
22	200	100			
25	200	100	100	50	
30	200	100	50	50	40
35	* 200	100	50	50	40
40	* 200	* 100	50	50	30
45	* 200	* 100	* 50	50	30
50	* 200	* 100	* 50	40	30
55		* 50	* 50	* 40	25
60		* 50	* 50	* 30	25
65		* 50	* 50	* 30	* 25
70			* 40	* 30	* 20
75			* 40	* 30	* 20
80			* 40	* 30	* 20
90				* 25	* 15
100				* 25	* 15

How to order or inquire: R830-912-finish code diameter x length

Example: R830-912-DI 4x10

Finish codes: DI for DISGO Plated




High Rustproof Plating



- No Hydrogen-Embrittlement.
- No Cr. contained.
- Special plating for High tensile Fasteners. (class 8.8 / 10.9 / 12.9)

* ... Half thread

HEX SOCKET CAP SCREW ISO 4762 / JIS B1176 / DIN 912

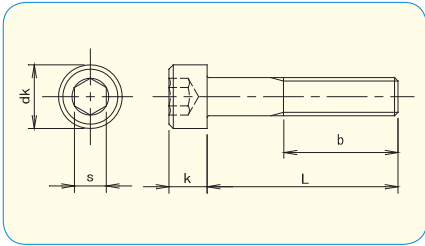

● **Material**
YUS-550



How to order or inquire: R830-DIN 912-material code diameter x length
 Example: R830-DIN 912-YU 4x16
 Material codes: YU for YUS-550

	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16
dk	3.8	4.5	5.5	7	8.5	10	13	16	18	24
k	2	2.5	3	4	5	6	8	10	12	16
s	1.5	2	2.5	3	4	5	6	8	10	14

		pcs / Box								
L \ d	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16
3	2000									
4	2000	2000								
5	2000	2000	2000							
6	2000	2000	2000	1000						
8	2000	2000	2000	1000	500					
10	2000	2000	1000	1000	500	200				
12	2000	2000	1000	500	200	200	200			
15	2000	2000	1000	500	200	200	200	100		
16			1000	500	200					
20		2000	1000	500	200	200	200	100		
25			* 1000	500	200	200	100	100		
30			* 1000	* 500	200	200	100	100	100	
35				* 500	* 200	* 100	100	100		
40				* 500	* 200	* 100	100	100	100	50
45					* 100	* 100	* 100	* 100		
50					* 100	* 100	* 100	* 100	50	
60									* 50	25
65										* 25
70									* 50	

* ... Half thread

HIGH STRENGTH
 YUS-550 has enough hardness to the core, the thread is able not to be transformed and gain high fastening.

HIGH TOUGHNESS
 Generally, stainless which has high tensile strength or hardness doesn't have toughness. But YUS-550 has high toughness with keeping these performance.

HIGH RUSTPROOF
 YUS-550 has rustproof more than the equal to SUS XM7 / SUS 304.