


HIGH TECHNOLOGY PLASTIC METRIC MACHINE SCREWS (continued)

(Part No.) - (Size Code No.) - (Material Code No.)  
 (below) (page 48) (page 47)


## HIGH TECHNOLOGY PLASTIC METRIC HEX CAP SCREWS and BOLTS

### HEX SOCKET HEAD CAP Part No. K101 -

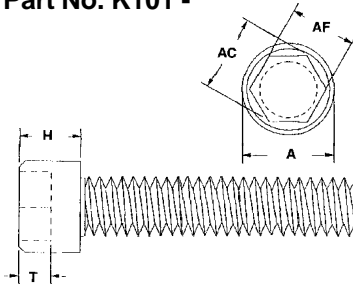

Thread Size	A max	H nom	T min	AF nom	AC min
M2 x 0,4	3,80	1,93	1,00	1,50	1,73
M2,5 x 0,45	4,45	2,43	1,10	2,00	2,30
M3 x 0,5	5,50	2,93	1,30	2,50	2,87
M4 x 0,7	7,00	3,91	2,00	3,00	3,44
M5 x 0,8	8,50	4,91	2,50	4,00	4,58
M6 x 1,0	10,00	5,85	3,00	5,00	5,72
M8 x 1,25	13,00	7,82	4,00	6,00	6,86
M10 x 1,5	16,00	9,82	5,00	8,00	9,15
M12 x 1,75	18,00	11,78	6,00	10,00	11,53


### HEX HEAD BOLTS Part No. J108 -



Thread Size	AF nom	H nom	AC min
M5 x 0,8	8,00	3,50	8,63
M6 x 1,00	10,00	4,00	10,89
M8 x 1,25	13,00	5,30	14,20
M10 x 1,5	17,00	6,40	18,72
M12 x 1,75	19,00	7,50	20,88


## HIGH TECHNOLOGY PLASTIC METRIC HEX FIT BOLTS

### HEX FIT BOLTS with Long Threaded Dog Point Part No. D309 -



Thread Size	AF nom	H nom	AC min
M8	13,00	5,30	14,38
M10	16/17,00	6,40	17,77/18,90
M12	18/19,00	7,50	19,85/20,88

### HEX FIT BOLTS with Short Threaded Dog Point Part No. D310 -

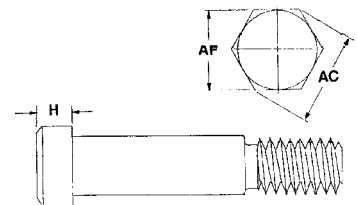

Parts are made to DIN dimensions. Materials are selected by customer.